LEGNI_RIGO

Structure: Two-layers boards with crossed fibres Birch

plywood support for the best stability of the platform

Nominal wear layer*: European Oak wood 4 mm (1/6") thick

Dimensions: Width: 90 mm (3 9/16")

Lenght: random from 700 mm (2' 4") up to 2400 mm (7' 11")

Thickness: 14/15 mm (9/16"-5/8")

Surface: Bevel, irregular cross etched (Saw marks)

Installation: Glued down

Recommended application: Residential, commercial

Installation on floor

heating systems: Allowed

Wood selection: COUNTRY_Knots of different dimensions and cracks

black filled

Milling: Hand made

Finish: VARNISH_

Easy Clean System non absorbing protection

Ordinary maintenance: Swiffer - Dusting pad - Vacuum cleaner

Cleaning with neutral detergent "Deter wood" and soft damp cloth

Extraordinary maintenance: Spread "Re_vita" refresher onto the surface with a soft damp cloth

Emissions: The entire range of Salis finishes is

compliant with CE regulation mark parameters

_FLOORING ORDERED AT DIFFERENT TIMES OR REPLENISHMENTS OF THE SAME SELECTION MAY SHOW DIFFERENCES IN COLOURS AND SHADES COMPARED TO THE ORIGINAL SUPPLY



							HITLAN
#01							
1000000	THE RESERVE	Carrier Control	DATE OF THE PARTY	Control In Section		4	
#02							
THE TREE PARTY.			A STATE OF THE STA				
#03							
BALL STREET, SALES	RESIDENCE OF STREET	Designation of the last of the		THE REAL PROPERTY.			
# 04							
#05							
	RESERVED TO STATE	THE PERSON NAMED IN			Contract of the		1 5 10
#06		CATALITY OF STREET		a Halaman Mark			
THE PARTY OF LABOUR.	AND THE PERSON NAMED IN		A REAL PROPERTY.	THE PARTY AND ADDRESS.		CONTRACTOR NAMED IN	1000
#07		CHARLES IN		医基准孔排尿 酶	四度排列基金數	在 即在为198	1000
No. of Concession, Name of Street, or other transfers.			The second second				No Toronto
#08							
#09							7.1
							BIR ALTO
							TO BE
NAT							

^{*:} Meaning the wear layer thickness before the manufacturing process of the surface

LEGNI_MOSSO

Structure: Two-layers boards with crossed fibres Birch

plywood support for the best stability of the platform

Nominal wear layer*: European Oak wood 4 mm (1/6") thick

Dimensions: Width: 3 dimensions:

90 / 140 / 190 mm about 3 9/16" / 5 ½" / 7 ½" about

Lenght: random from 700 mm (2' 4") up to 2400 mm (7' 11")

Thickness: 14/15 mm (9/16"-5/8")

Surface: Bevel, irregular cross etched (Saw marks),

slanted engraving, brushing

Installation: Glued down or floating

Recommended application: Residential, commercial

Installation on floor

heating systems: Allowed

Wood selection: COUNTRY_Knots of different dimensions and cracks

black filled

Milling: Hand made

Finish: VARNISH

Easy Clean System non absorbing protection

Ordinary maintenance: Swiffer - Dusting pad - Vacuum cleaner

Cleaning with neutral detergent "Deter wood" and soft damp cloth

Extraordinary maintenance: Spread "Re vita" refresher onto the surface with a soft damp cloth

Emissions: The entire range of Salis finishes is

compliant with CE regulation mark parameters

_FLOORING ORDERED AT DIFFERENT TIMES OR REPLENISHMENTS OF THE SAME SELECTION MAY SHOW DIFFERENCES IN COLOURS AND SHADES COMPARED TO THE ORIGINAL SUPPLY







^{*:} Meaning the wear layer thickness before the manufacturing process of the surface

LEGNI_SEGNO

Structure: Two-layers 45° cut boards with Birch plywood support

Nominal wear layer*: European Oak wood 4 mm (1/6") thick

Dimensions: Width: 90 mm (1/6")

Lenght: 600/720 mm (2' / 2' 4") Thickness: 14/15 mm (9/16"-5/8")

Surface: Bevel, irregular cross etched (Saw marks)

Installation: Glued down

Recommended application: Residential, commercial

Installation on floor

heating systems: Allowed

Wood selection: COUNTRY_Knots of different dimensions and cracks

black filled

Milling: Hand made

Finish: VARNISH

Easy Clean System non absorbing protection

Ordinary maintenance: Swiffer - Dusting pad - Vacuum cleaner

Cleaning with neutral detergent "Deter wood" and soft damp cloth


Extraordinary maintenance: Spread "Re vita" refresher onto the surface with a soft damp cloth

Emissions: The entire range of Salis finishes is

compliant with CE regulation mark parameters

_FLOORING ORDERED AT DIFFERENT TIMES OR REPLENISHMENTS OF THE SAME SELECTION MAY SHOW DIFFERENCES IN COLOURS AND SHADES COMPARED TO THE ORIGINAL SUPPLY



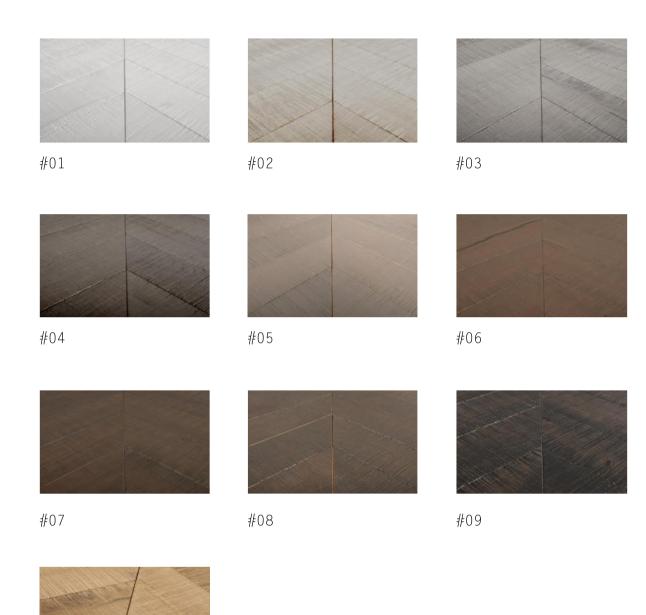

NAT

^{*:} Meaning the wear layer thickness before the manufacturing process of the surface


ACCESSORIES

TRANSITION PIECE

Dimensions:

Lenght 1000 mm abt (3'3") Thickness 14/15 mm (9/16" | 5/8")

Matching thread for all colours of Legni collection




BULLNOSE

Dimensions:

Height 30 mm $(1 \frac{1}{4})$ Depht 110 mm $(4 \frac{1}{4})$ Lenght 1000 mm abt $(3 \frac{1}{3})$ Thickness 14/15 mm (9/16) [5/8]

Matching bullnose for all colours

of Legni collection



SKIRTING

Dimensions:

Height 45 mm (1 ¾") Lenght 2400 mm abt (8') Thickness 13 mm (½")

Matching square skirting of all colours of Legni Collection

Note: the matching skirting of the collection Legni by Officina107 will never be identical to the woodflooring but just a close match. Furthermore, unlike the floor, the skirting is without knots, saw marks or any other superficial treatment



