

## PANGEA COLLECTION

Structure:	Three-layers boards with crossed fibres broadleaf support
Nominal wear layer*:	European Oak wood 3 mm (1/6") thick
Dimensions:	Width: 45 mm (1 3/4") Length: 900 mm (3') Thickness: 12 mm (1/2")
Surface:	Bevel, light random handmade planing
Installation:	Glued down
Recommended application:	Residential, commercial
Installation on floor heating systems:	Allowed
Wood selection:	COUNTRY_Knots of different dimensions and cracks black filled
Milling:	Hand made
Finish:	PROTEKTA PLUS®_ Innovative last generation finish. Coloured pigments + high performances oil for commercial high traffic spaces
Ordinary maintenance:	Swiffer - Dusting pad - Vacuum cleaner. Cleaning with neutral detergent for oiled floors "Deter oil" and soft damp cloth
Extraordinary maintenance:	Cleaning with "Deter oil" neutral detergent, further coating of the oil for extraordinary maintenance "Re_vita". Spread onto the surface with a soft damp cloth
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters



NOTE: PANGEA COLLECTION CAN BE INSTALLED ALSO AS ITALIAN HERRINGBONE PATTERN.  
EVERY BOX CONTAINS LEFT AND RIGHT ELEMENTS

\_FLOORING ORDERED AT DIFFERENT TIMES OR REPLENISHMENTS OF THE SAME SELECTION  
MAY SHOW DIFFERENCES IN COLOURS AND SHADES COMPARED TO THE ORIGINAL SUPPLY

\*: Meaning the wear layer thickness before the manufacturing process of the surface

## PANGEA COLLECTION\_MODULO

Structure:	Three-layers square tiles with crossed fibres broadleaf support
Nominal wear layer*:	European Oak wood 3 mm (1/6") thick
Dimensions:	Width: 900 mm (3') Length: 900 mm (3') Thickness: 12 mm (1/2")
Surface:	Bevel, light random handmade planing
Installation:	Glued down
Recommended application:	Residential, commercial
Installation on floor heating systems:	Allowed
Wood selection:	COUNTRY_Knots of different dimensions and cracks black filled
Milling:	Hand made
Finish:	PROTEKTA PLUS®_ Innovative last generation finish. Coloured pigments + high performances oil for commercial high traffic spaces
Ordinary maintenance:	Swiffer - Dusting pad - Vacuum cleaner. Cleaning with neutral detergent for oiled floors "Deter oil" and soft damp cloth
Extraordinary maintenance:	Cleaning with "Deter oil" neutral detergent, further coating of the oil for extraordinary maintenance "Re_vita". Spread onto the surface with a soft damp cloth
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters




PETRA



FANGO



CRETA

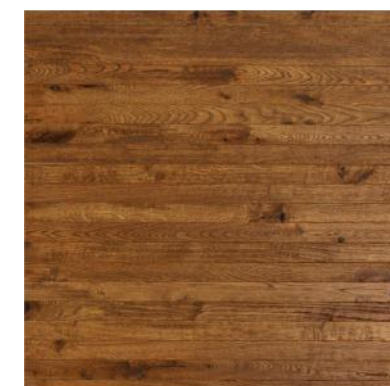

TERRA



LAVA

\_FLOORING ORDERED AT DIFFERENT TIMES OR REPLENISHMENTS OF THE SAME SELECTION  
MAY SHOW DIFFERENCES IN COLOURS AND SHADES COMPARED TO THE ORIGINAL SUPPLY

\*: Meaning the wear layer thickness before the manufacturing process of the surface

## PANGEA COLLECTION\_QUADRO

Structure:	Three-layers square tiles with crossed fibres broadleaf support
Nominal wear layer*:	European Oak wood 3 mm (1/6") thick
Dimensions:	Width: 720 mm (1' 3/4") Length: 720 mm (1' 3/4") Thickness: 12 mm (1/2")
Surface:	Bevel, light random handmade planing
Installation:	Glued down
Recommended application:	Residential, commercial
Installation on floor heating systems:	Allowed
Wood selection:	COUNTRY_Knots of different dimensions and cracks filled in black
Milling:	Hand made
Finish:	PROTEKTA PLUS®_ Innovative last generation finish. Coloured pigments + high performances oil for commercial high traffic spaces
Ordinary maintenance:	Swiffer - Dusting pad - Vacuum cleaner. Cleaning with neutral detergent for oiled floors "Deter oil" and soft damp cloth
Extraordinary maintenance:	Cleaning with "Deter oil" neutral detergent, further coating of the oil for extraordinary maintenance "Re_vita". Spread onto the surface with a soft damp cloth
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters



PETRA



FANGO



CRETA



TERRA



LAVA

\_FLOORING ORDERED AT DIFFERENT TIMES OR REPLENISHMENTS OF THE SAME SELECTION MAY SHOW DIFFERENCES IN COLOURS AND SHADES COMPARED TO THE ORIGINAL SUPPLY

\*: Meaning the wear layer thickness before the manufacturing process of the surface


## ACCESSORIES

### TRANSITION PIECE

Dimensions:

Length 1000 mm abt (3'3")  
 Thickness 12 mm (½")

Matching thread for all colours of the Pangea collection

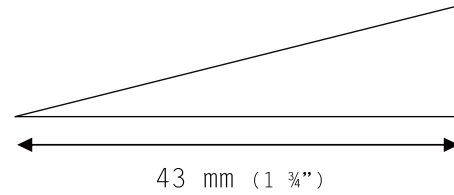


### BULLNOSE

Dimensions:

Height 30 mm (1 ¼")  
 Depth 80 mm (3 ¼")  
 Length 1000 mm abt (3'3")  
 Thickness 12 mm (½")

Matching bullnose for all colours of the Pangea collection

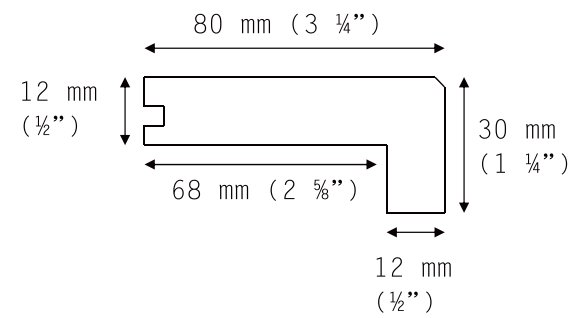

### SKIRTING

Dimensions:

Height 80 mm (3 ¼")  
 Length 2400 mm abt (8')  
 Thickness 13 mm (½")

Matching skirting for all colours of the Pangea collection



Note: the matching skirting will never be identical to the woodflooring but just a close match.

Furthermore, unlike the floor, the skirting is without knots and not planed

